

Telefon: +49 (0)4171 / 8480-0 Homepage: www.ampri.de e-mail: info@ampri.de

Technical Data Sheet


4MPri

Article-No.: **01252**

Description: MED-COMFORT Black

Examination glove, Vinyl-Nitrile-Mixture

black, non sterile, powder free





PRODUCT DESCRIP	TION						
material	Latex	Nitrile	□ Vinyl	☑ Vinyl-Nitrile-	☐ Polyethy-lene	☐ TPE	cotton
				mixture	(PE)		
colour	☐ white	☐ blue	✓ black	mint	purple	☐ mix	cobalt-blue
characteristics	☐ prepowdered	powderfree	☐ sterile	non sterile	☑ ambidex-	☐ fits hand-	☐ biodgra-
					trous	specific	dable
surface	☐ full textured	□ finger		embossed	☐ chlorinated ins	side	
		textured					
SIZES							
	XS (5-6)	S (6-7)	M (7-8)	L (8-9)	XL (9-10)	XXL (10-11)	XXXL (11-12)
width	-	80 ± 10 mm	95 ± 10 mm	110 ± 10 mm	115 ± 10 mm	-	-
length	-	≥ 240 mm	≥ 240 mm	≥ 240 mm	≥ 240 mm	-	-
REGULATORY AFFA	IRS						
PPE-Regulation	☐ Category I	☐ Category II	Category III	☐ no PPE-article			
(EU) 2016/425							
MD-Regulation	✓ Class I	Class II a	Class III	☐ sterile	☐ measuring	no medical	ϵ
(EU) 2017/745					function	device	, ,
Food Contact	☑ acidic foods	☑ aqueous	☐ fatty foods	☑ alcoholic	☑ dry foods	not approved	
(EG) 1935/2004		foods		foods		for food-	521
						contact	
STANDARDISATION							
EN 388 Mechanical	abrasion	blade cut	tear resistance	puncture	blade cut	impact test	
Risks	resistance	resistance	tear resistance	resistance	resistance	impact test	
LISKS	resistance	resistance			resistance		
		Coune-Test			TDM-Tost		
Level	not applicable	Coupe-Test			TDM-Test		
Level	not applicable	Coupe-Test				da sua da Car	
EN 374-1	chemical	•	code letter	level	permeation time	degradation	ISO 274 1/Tupo D
	chemical Sodium hydroxide	40%	К	level 6	permeation time > 480 min	-1,2 %	ISO 374-1/Type B
EN 374-1 Chemical Risks	chemical Sodium hydroxide Hydrogen Peroxide	40% e 30%	K P		permeation time > 480 min > 480 min	-1,2 % 2,7 %	ISO 374-1/Type B
EN 374-1 Chemical Risks EN 374-4	chemical Sodium hydroxide	40% e 30%	К	level 6	permeation time > 480 min	-1,2 %	ISO 374-1/Type B
EN 374-1 Chemical Risks	chemical Sodium hydroxide Hydrogen Peroxide	40% e 30%	K P		permeation time > 480 min > 480 min	-1,2 % 2,7 %	ISO 374-1/Type B
EN 374-1 Chemical Risks EN 374-4	chemical Sodium hydroxide Hydrogen Peroxide	40% e 30%	K P		permeation time > 480 min > 480 min	-1,2 % 2,7 %	ISO 374-1/Type B
EN 374-1 Chemical Risks EN 374-4	chemical Sodium hydroxide Hydrogen Peroxide Formaldehyde 37%	40% = 30% 6	K P T	level 6 6 6 6	permeation time	-1,2 % 2,7 % -8,1 %	
EN 374-1 Chemical Risks EN 374-4 Degradation	chemical Sodium hydroxide Hydrogen Peroxide Formaldehyde 37%	40% = 30% 6	K P T	level 6 6 6 6	permeation time > 480 min > 480 min	-1,2 % 2,7 % -8,1 %	KPT 8N 150 278-5-2016
EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5	chemical Sodium hydroxide Hydrogen Peroxide Formaldehyde 37%	40% = 30% 6	K P T	level 6 6 6 6	permeation time	-1,2 % 2,7 % -8,1 %	KPT
EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5 microorganism tightness	chemical Sodium hydroxide Hydrogen Peroxide Formaldehyde 37% The glove is tight a	40% e 30% 6	K P T T ms (viral, bacteria a	level 6 6 6 6	permeation time	-1,2 % 2,7 % -8,1 %	KPT 8N 150 278-5-2016
EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5 microorganism tightness	chemical Sodium hydroxide Hydrogen Peroxide Formaldehyde 37% The glove is tight a	40% e 30% 6	K P T	level 6 6 6 6	permeation time	-1,2 % 2,7 % -8,1 %	KPT 8N 150 278-5-2016
EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5 microorganism tightness	chemical Sodium hydroxide Hydrogen Peroxide Formaldehyde 37% The glove is tight a	40% e 30% 6	K P T T ms (viral, bacteria a	level 6 6 6 6	permeation time	-1,2 % 2,7 % -8,1 %	KPT 8N 150 278-5-2016
EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5 microorganism tightness	chemical Sodium hydroxide Hydrogen Peroxide Formaldehyde 37% The glove is tight a	40% 2 30% 6 gainst microorganis	K P T ms (viral, bacteria a	level 6 6 6 6	permeation time	-1,2 % 2,7 % -8,1 %	KPT EN ISO 374-5-2016 VIRUS
EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5 microorganism tightness EN ISO 21420 protective gloves	chemical Sodium hydroxide Hydrogen Peroxide Formaldehyde 37% The glove is tight a	40% 2 30% 6 gainst microorganis	K P T ms (viral, bacteria a	level 6 6 6 6 and fungi). Test acco	permeation time	-1,2 % 2,7 % -8,1 %	KPT EN ISO 374-5-2016 VIRUS
EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5 microorganism tightness EN ISO 21420 protective gloves	chemical Sodium hydroxide Hydrogen Peroxide Formaldehyde 37% The glove is tight a	40% 2 30% 6 gainst microorganis	K P T ms (viral, bacteria a	level 6 6 6 6 and fungi). Test acco	permeation time	-1,2 % 2,7 % -8,1 %	KPT EN ISO 374-5-2016 VIRUS
EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5 microorganism tightness EN ISO 21420 protective gloves EN 455 medical gloves for	chemical Sodium hydroxide Hydrogen Peroxide Formaldehyde 37% The glove is tight a The glove meets th	40% 2 30% 6 gainst microorganis ne requirements acco	K P T T cording to EN ISO 21	level 6 6 6 6 6 and fungi). Test acco	permeation time	-1,2 % 2,7 % -8,1 % - method B.	KPT EN ISO 374-5-2016 VIRUS
EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5 microorganism tightness EN ISO 21420 protective gloves EN 455 medical gloves for single use	chemical Sodium hydroxide Hydrogen Peroxide Formaldehyde 37% The glove is tight a The glove meets th	40% 2 30% 6 gainst microorganis ne requirements accorder requireme	K P T T cording to EN ISO 21	level 6 6 6 6 6 and fungi). Test acco	permeation time	-1,2 % 2,7 % -8,1 % - method B.	KPT EN 150 324-52016 WIRUS EN 455
EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5 microorganism tightness EN ISO 21420 protective gloves EN 455 medical gloves for single use EN 455-1	chemical Sodium hydroxide Hydrogen Peroxide Formaldehyde 37% The glove is tight a The glove meets th The glove meets th	40% 2 30% 6 gainst microorganis ne requirements accorder requireme	K P T T cording to EN ISO 21	level 6 6 6 6 6 and fungi). Test acco	permeation time	-1,2 % 2,7 % -8,1 % - method B.	KPT EN 150 274-52016 EN 455 AQL
EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5 microorganism tightness EN ISO 21420 protective gloves EN 455 medical gloves for single use EN 455-1	chemical Sodium hydroxide Hydrogen Peroxide Formaldehyde 37% The glove is tight a The glove meets th The glove meets th	40% 2 30% 6 gainst microorganis ne requirements accorder requireme	K P T T cording to EN ISO 21	level 6 6 6 6 6 and fungi). Test acco	permeation time	-1,2 % 2,7 % -8,1 % - method B.	KPT EN 150 274-52016 EN 455 AQL
EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5 microorganism tightness EN ISO 21420 protective gloves EN 455 medical gloves for single use EN 455-1 freedom from holes	chemical Sodium hydroxide Hydrogen Peroxide Formaldehyde 37% The glove is tight a The glove meets th The glove meets th The glove has an A general Inspection	40% 2 30% 6 gainst microorganis ne requirements accorder requireme	K P T T cording to EN ISO 21	level 6 6 6 6 6 and fungi). Test acco	permeation time	-1,2 % 2,7 % -8,1 % - method B.	KPT EN 150 274-52016 EN 455 AQL
EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5 microorganism tightness EN ISO 21420 protective gloves EN 455 medical gloves for single use EN 455-1 freedom from holes	chemical Sodium hydroxide Hydrogen Peroxide Formaldehyde 37% The glove is tight a The glove meets th The glove meets th The glove has an A general Inspection	40% 2 30% 6 gainst microorganis ne requirements accorder requireme	K P T T cording to EN ISO 21	level 6 6 6 6 6 and fungi). Test acco	permeation time	-1,2 % 2,7 % -8,1 % - method B.	KPT EN 150 274-52016 EN 455 AQL



21423 Winsen (Luhe) - Germany Telefon: +49 (0)4171 / 8480-0 Homepage: www.ampri.de

e-mail: info@ampri.de


Technical Data Sheet

Article-No.: 01252

Description: MED-COMFORT Black

Examination glove, Vinyl-Nitrile-Mixture


black, non sterile, powder free

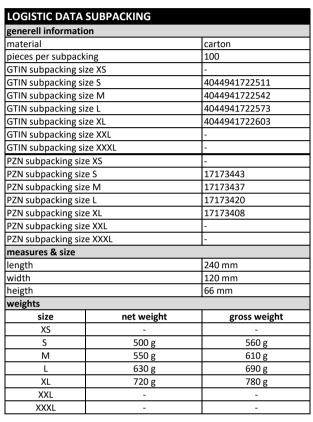

LOGISTIC DATA P	ΔΙΕΤΤΕ	
general information		
kind of palett		euro-palette
measures & size		
cartons per layer	9	
layers per palette		7
heigth of the palette	2	194 cm
weights		
size	net weight	gross weight
XS	-	-
S 384 g		409 g
M	416 g	441 g
L	466 g	491 g
XL	523 g	548 g
XXL	-	-
XXXL	-	-



LOGISTIC DATA	OUTER PACKING	
generell informatio		
material		carton
subpackings per out	10	
GTIN outer packing	-	
GTIN outer packing	4044941722528	
GTIN outer packing	4044941722559	
GTIN outer packing	4044941722580	
GTIN outer packing	4044941722610	
GTIN outer packing	-	
GTIN outer packing	-	
PZN outer packing s	-	
PZN outer packing s	ize S	-
PZN outer packing s	-	
PZN outer packing s	-	
PZN outer packing s	-	
PZN outer packing s	-	
PZN outer packing s	-	
measures & size		
length	345 mm	
width	250 mm	
heigth	255 mm	
weights		
size	net weight	gross weight
XS	-	-
S	5.600 g	6.100 g
М	6.100 g	6.600 g
L	6.900 g	7.400 g
XL	7.800 g	8.300 g
XXL	-	-
XXXL -		-





21423 Winsen (Luhe) - Germany Telefon: +49 (0)4171 / 8480-0

Homepage: www.ampri.de e-mail: info@ampri.de

Technical Data Sheet

Article-No.: 01252

Description: MED-COMFORT Black

Examination glove, Vinyl-Nitrile-Mixture

black, non sterile, powder free



WARNINGS AND SAFETY INFORMATION

storage /	expiry
date	

Store gloves in original packaging in a cool and dry place without additional weight, protect from direct sunlight. Do not store near ozone sources (laser printers, copiers). The actual expiry time in use cannot be specified in general terms, as it depends on the general conditions of use. An individual risk assessment must be carried out in each case. The expiry date - valid for proper storage - is stated on the packaging.

use and control

Always use protective gloves only for the intended use and in the correct size. A check/risk assessment must be carried out to ensure that the gloves are suitable for the intended use, as the conditions at the workplace may deviate from those of the type test depending on temperature, abrasion and degradation. Breakthrough times and permeation levels are based on laboratory measurements and are determined using samples taken from the palm of the hand. The actual duration of protection of a glove with a specific substance can vary significantly due to the conditions of use (temperature, abrasion, stretching). In the case of aggressive chemicals, degradation (change in mechanical properties) can be an important factor to consider when selecting chemical-resistant gloves. This information does not reflect the actual duration of protection in the workplace and the distinction between mixtures and pure chemicals. The chemical resistance was determined under laboratory conditions only on the basis of samples from the palm and refers only to the chemicals tested. The situation may be different if the chemical is used in a mixture. The penetration resistance was evaluated under laboratory conditions and refers only to the tested specimen. The degradation results according to EN ISO 374-4 show the change in puncture resistance of the gloves after exposure to the tested chemical.

Before use, the gloves must be checked for holes or damage.

disposal

Used gloves must be disposed of in accordance with the disposal regulations of the local waste disposal company. Unused gloves can be disposed of with household waste.

disinfection

Disinfection is not intended for these gloves and is the responsibility of the user.

warnings/ allergy information

Protective gloves are intended for single use only.

Free from thiurams, carbamates and mercaptobenzothiazoles.

donning and doffing instructions











rev-no.:

date 25.09.2024 changes and errors excepted