



21423 Winsen (Luhe) - Germany Telefon: +49 (0)4171 / 8480-0

Homepage: www.ampri.de e-mail: info@ampri.de


Technical Data Sheet

Article-No.: **081307**

Description: SOLID SAFETY HIGH RISK PRO

Nitrile glove

blue, non sterile, powder free





PRODUCT DESCRIP	TION						
material	☐ Latex	✓ Nitrile	□ Vinyl	☐ Vinyl-Nitrile-	☐ Polyethy-lene	☐ TPE	□ cotton
				mixture	(PE)		
colour	□ white		black	□ mint	□ purple	□ mix	
characteristics	☐ prepowdered	powderfree	☐ sterile	✓ non sterile	☑ ambidex-	fits hand-	☐ biodgra-
					trous	specific	dable
surface	✓ full textured	□ finger	☐ not textured	embossed	chlorinated ins	ide	
		textured					
SIZES							
	XS (5-6)	S (6-7)	M (7-8)	L (8-9)	XL (9-10)	XXL (10-11)	XXXL (11-12)
width	-	80 ± 10 mm	95 ± 10 mm	110 ± 10 mm	115 ± 10 mm	125 ± 10 mm	135 ± 10 mm
length	-	300 ± 10 mm	300 ± 10 mm	300 ± 10 mm	300 ± 10 mm	300 ± 10 mm	300 ± 10 mm
REGULATORY AFFA	IPC						<u> </u>
PPE-Regulation	☐ Category I	☐ Category II	✓ Category III	no PPE-article			
(EU) 2016/425	Category	Category	Category III	IIO PPE-article			
MD-Regulation	Class I	☐ Class II a	☐ Class III	sterile	☐ measuring	no medical	CE
(EU) 2017/745		Cia55 ii a		3.61.116	function	device	
Food Contact	☑ acidic foods	☑ aqueous	✓ fatty foods	☑ alcoholic	✓ dry foods	not approved	
(EG) 1935/2004		foods		foods		for food-	527
(10) 1000, 100 .				10000		contact	
STANDARDISATION							
EN 388 Mechanical	abrasion	blade cut	tear resistance	puncture	blade cut	impact test	
Risks	resistance	resistance		resistance	resistance		l l'd⊫l
							(= /
	_	Coupe-Test	_	_	TDM-Test		
Level	2		0	0	TDM-Test X		
Level EN 374-1	chemical	Coupe-Test	0 code letter	level	X permeation time	degradation	
	chemical n-Heptane	Coupe-Test 0	code letter	level 6	x permeation time > 480 min	13,6 %	ISO 374-1/Type A
EN 374-1 Chemical Risks	chemical n-Heptane Sodium hydroxide	Coupe-Test 0	code letter J K	6 6	x permeation time > 480 min > 480 min	13,6 % 5,0 %	ISO 374-1/Type A
EN 374-1	chemical n-Heptane Sodium hydroxide Ammonium Hydro	Coupe-Test 0 40% xide 25%	code letter J K O	6 6 2	x permeation time > 480 min > 480 min > 30 min	13,6 % 5,0 % 34,7 %	ISO 374-1/Type A
EN 374-1 Chemical Risks	chemical n-Heptane Sodium hydroxide Ammonium Hydro Hydrogen Peroxide	40% xide 25% 2 30%	J K O	6 6 2 6	x permeation time > 480 min > 480 min > 30 min > 480 min	13,6 % 5,0 % 34,7 % 43,4 %	ISO 374-1/Type A
EN 374-1 Chemical Risks EN 374-4	chemical n-Heptane Sodium hydroxide Ammonium Hydro Hydrogen Peroxide Hydrofloric Acid 40	Coupe-Test 0 40% xide 25% 2 30% 9%	Code letter J K O P S	6 6 2 6 2	X permeation time > 480 min > 480 min > 30 min > 480 min > 30 min > 30 min	13,6 % 5,0 % 34,7 % 43,4 % X	
EN 374-1 Chemical Risks EN 374-4 Degradation	chemical n-Heptane Sodium hydroxide Ammonium Hydro Hydrogen Peroxide Hydrofloric Acid 40 Formaldehyde 37%	Coupe-Test 0 40% xide 25% 2 30% 0%	Code letter J K O P S T	6 6 2 6 2 4	X permeation time	13,6 % 5,0 % 34,7 % 43,4 % X 21,7 %	JKOPST
EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5	chemical n-Heptane Sodium hydroxide Ammonium Hydro Hydrogen Peroxide Hydrofloric Acid 40 Formaldehyde 37%	Coupe-Test 0 40% xide 25% 2 30% 0%	Code letter J K O P S T	6 6 2 6 2 4	X permeation time > 480 min > 480 min > 30 min > 480 min > 30 min > 30 min	13,6 % 5,0 % 34,7 % 43,4 % X 21,7 %	JKOPST 89 50 3745-2016
EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5 microorganism	chemical n-Heptane Sodium hydroxide Ammonium Hydro Hydrogen Peroxide Hydrofloric Acid 40 Formaldehyde 37%	Coupe-Test 0 40% xide 25% 2 30% 0%	Code letter J K O P S T	6 6 2 6 2 4	X permeation time	13,6 % 5,0 % 34,7 % 43,4 % X 21,7 %	JKOPST
EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5 microorganism tightness	chemical n-Heptane Sodium hydroxide Ammonium Hydro Hydrogen Peroxide Hydrofloric Acid 40 Formaldehyde 37% The glove is tight a	Coupe-Test 0 40% xide 25% 2 30% 9% 6 gainst microorganis	code letter J K O P S T sms (viral, bacteria a	level 6 6 2 6 2 4 and fungi). Test according to the second fungion of the second funcion	X permeation time	13,6 % 5,0 % 34,7 % 43,4 % X 21,7 %	JKOPST (N) 150 274-5-2016
EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5 microorganism tightness	chemical n-Heptane Sodium hydroxide Ammonium Hydro Hydrogen Peroxide Hydrofloric Acid 40 Formaldehyde 37% The glove is tight a	Coupe-Test 0 40% xide 25% 2 30% 9% 6 gainst microorganis	Code letter J K O P S T	level 6 6 2 6 2 4 and fungi). Test according to the second fungion of the second funcion	X permeation time	13,6 % 5,0 % 34,7 % 43,4 % X 21,7 %	JKOPST (N) 150 274-5-2016
EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5 microorganism tightness	chemical n-Heptane Sodium hydroxide Ammonium Hydro Hydrogen Peroxide Hydrofloric Acid 40 Formaldehyde 37% The glove is tight a	Coupe-Test 0 40% xide 25% 2 30% 9% 6 gainst microorganis	code letter J K O P S T sms (viral, bacteria a	level 6 6 2 6 2 4 and fungi). Test according to the second fungion of the second funcion	X permeation time	13,6 % 5,0 % 34,7 % 43,4 % X 21,7 %	JKOPST (N) 150 274-5-2016
EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5 microorganism tightness EN ISO 21420 protective gloves	chemical n-Heptane Sodium hydroxide Ammonium Hydro Hydrogen Peroxide Hydrofloric Acid 40 Formaldehyde 37% The glove is tight a	Coupe-Test 0 40% xide 25% 2 30% 9% 6 gainst microorganis	code letter J K O P S T sms (viral, bacteria a	level 6 6 2 6 2 4 and fungi). Test according to the second fungion of the second funcion	X permeation time	13,6 % 5,0 % 34,7 % 43,4 % X 21,7 %	JKOPST (N) 150 274-5-2016
EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5 microorganism tightness EN ISO 21420 protective gloves EN 455	chemical n-Heptane Sodium hydroxide Ammonium Hydro Hydrogen Peroxide Hydrofloric Acid 40 Formaldehyde 37% The glove is tight a	Coupe-Test 0 40% xide 25% 2 30% 9% 6 gainst microorganis	code letter J K O P S T sms (viral, bacteria a	level 6 6 2 6 2 4 and fungi). Test according to the second fungion of the second funcion	X permeation time	13,6 % 5,0 % 34,7 % 43,4 % X 21,7 %	JKOPST (N) 150 274-5-2016
EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5 microorganism tightness EN ISO 21420 protective gloves EN 455 medical gloves for	chemical n-Heptane Sodium hydroxide Ammonium Hydro Hydrogen Peroxide Hydrofloric Acid 40 Formaldehyde 37% The glove is tight a	Coupe-Test 0 40% xide 25% 2 30% 9% 6 gainst microorganis	code letter J K O P S T sms (viral, bacteria a	level 6 6 2 6 2 4 and fungi). Test according to the second fungion of the second funcion	X permeation time	13,6 % 5,0 % 34,7 % 43,4 % X 21,7 %	JKOPST (N) 150 274-5-2016
EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5 microorganism tightness EN ISO 21420 protective gloves	chemical n-Heptane Sodium hydroxide Ammonium Hydro Hydrogen Peroxide Hydrofloric Acid 40 Formaldehyde 37% The glove is tight a The glove meets th	Coupe-Test 0 40% xide 25% 2 30% 0% 6 gainst microorganis	code letter J K O P S T sms (viral, bacteria a	level	X permeation time	13,6 % 5,0 % 34,7 % 43,4 % X 21,7 % method B.	JKOPST BN B033452016 VIRUS
EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5 microorganism tightness EN ISO 21420 protective gloves EN 455 medical gloves for single use	chemical n-Heptane Sodium hydroxide Ammonium Hydro Hydrogen Peroxide Hydrofloric Acid 40 Formaldehyde 37% The glove is tight a The glove meets th not applicable The glove has an A	Coupe-Test 0 40% xide 25% 2 30% 0% 6 gainst microorganis ne requirements acco	code letter J K O P S T sms (viral, bacteria a	level	X permeation time	13,6 % 5,0 % 34,7 % 43,4 % X 21,7 % method B.	JKOPST EN 150 224-5-2016 VIRUS
EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5 microorganism tightness EN ISO 21420 protective gloves EN 455 medical gloves for single use EN 455-1	chemical n-Heptane Sodium hydroxide Ammonium Hydro Hydrogen Peroxide Hydrofloric Acid 40 Formaldehyde 37% The glove is tight a The glove meets th	Coupe-Test 0 40% xide 25% 2 30% 0% 6 gainst microorganis ne requirements acco	code letter J K O P S T sms (viral, bacteria a	level	X permeation time	13,6 % 5,0 % 34,7 % 43,4 % X 21,7 % method B.	JKOPST BN B033452016 VIRUS
EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5 microorganism tightness EN ISO 21420 protective gloves EN 455 medical gloves for single use EN 455-1 freedom from holes	chemical n-Heptane Sodium hydroxide Ammonium Hydro Hydrogen Peroxide Hydrofloric Acid 40 Formaldehyde 37% The glove is tight a The glove meets th not applicable The glove has an A general Inspection	Coupe-Test 0 40% xide 25% 2 30% 0% 6 gainst microorganis ne requirements acc	code letter J K O P S T sms (viral, bacteria a	level	X permeation time	13,6 % 5,0 % 34,7 % 43,4 % X 21,7 % method B.	JKOPST IN 150 274-5-2016 VIRUS
EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5 microorganism tightness EN ISO 21420 protective gloves EN 455 medical gloves for single use EN 455-1 freedom from holes	chemical n-Heptane Sodium hydroxide Ammonium Hydro Hydrogen Peroxide Hydrofloric Acid 40 Formaldehyde 37% The glove is tight a The glove meets th not applicable The glove has an A	Coupe-Test 0 40% xide 25% 2 30% 0% 6 gainst microorganis ne requirements acc	code letter J K O P S T sms (viral, bacteria a	level	X permeation time	13,6 % 5,0 % 34,7 % 43,4 % X 21,7 % method B.	JKOPST EN 150 224-5-2016 VIRUS
EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5 microorganism tightness EN ISO 21420 protective gloves EN 455 medical gloves for single use EN 455-1 freedom from holes	chemical n-Heptane Sodium hydroxide Ammonium Hydro Hydrogen Peroxide Hydrofloric Acid 40 Formaldehyde 37% The glove is tight a The glove meets th not applicable The glove has an A general Inspection	Coupe-Test 0 40% xide 25% 2 30% 0% 6 gainst microorganis ne requirements acc	code letter J K O P S T sms (viral, bacteria a	level	X permeation time	13,6 % 5,0 % 34,7 % 43,4 % X 21,7 % method B.	JKOPST EN 150 224-5-2016 VIRUS



21423 Winsen (Luhe) - Germany Telefon: +49 (0)4171 / 8480-0 Homepage: www.ampri.de

omepage: www.ampri.de e-mail: info@ampri.de


Technical Data Sheet

Article-No.: **081307**

Description: SOLID SAFETY HIGH RISK PRO

Nitrile glove


blue, non sterile, powder free

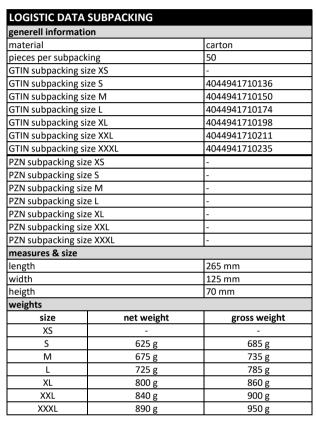

LOGISTIC DATA PALETTE						
general information	1					
kind of palett		euro-palette				
measures & size						
cartons per layer	8					
layers per palette		6				
heigth of the palette		165 cm				
weights						
size	net weight	gross weight				
XS	-	-				
S	353 kg	378 kg				
M	377 kg	402 kg				
L	401 kg	426 kg				
XL	437 kg	462 kg				
XXL	456 kg	481 kg				
XXXL	480 kg	505 kg				



generell information	OUTER PACKING			
material	<u> </u>	carton		
subpackings per ou	ter packing	10		
GTIN outer packing		-		
GTIN outer packing	size S	4044941710143		
GTIN outer packing		4044941710167		
GTIN outer packing		4044941710181		
GTIN outer packing	4044941710204			
GTIN outer packing	4044941710228			
GTIN outer packing	size XXXL	4044941710242		
PZN outer packing	size XS	-		
PZN outer packing	size S	-		
PZN outer packing	size M	-		
PZN outer packing	size L	-		
PZN outer packing	size XL	-		
PZN outer packing	size XXL			
PZN outer packing	size XXXL	-		
measures & size				
length		390 mm		
width		255 mm		
heigth		250 mm		
weights				
size	net weight	gross weight		
XS	-	-		
S	6.850 g	7.350 g		
M	7.350 g	7.850 g		
L	7.850 g	8.350 g		
XL	8.600 g	9.100 g		
XXL	9.000 g	9.500 g		
XXXL	9.500 g	10.000 g		





21423 Winsen (Luhe) - Germany Telefon: +49 (0)4171 / 8480-0

Homepage: www.ampri.de e-mail: info@ampri.de

Technical Data Sheet

Article-No.: **081307**

Description: SOLID SAFETY HIGH RISK PRO

Nitrile glove

blue, non sterile, powder free



WARNINGS AND SAFETY INFORMATION

storage /	expiry
date	

Store gloves in original packaging in a cool and dry place without additional weight, protect from direct sunlight. Do not store near ozone sources (laser printers, copiers). The actual expiry time in use cannot be specified in general terms, as it depends on the general conditions of use. An individual risk assessment must be carried out in each case. The expiry date - valid for proper storage - is stated on the packaging.

use and control

Always use protective gloves only for the intended use and in the correct size. A check/risk assessment must be carried out to ensure that the gloves are suitable for the intended use, as the conditions at the workplace may deviate from those of the type test depending on temperature, abrasion and degradation. Breakthrough times and permeation levels are based on laboratory measurements and are determined using samples taken from the palm of the hand. The actual duration of protection of a glove with a specific substance can vary significantly due to the conditions of use (temperature, abrasion, stretching). In the case of aggressive chemicals, degradation (change in mechanical properties) can be an important factor to consider when selecting chemical-resistant gloves. This information does not reflect the actual duration of protection in the workplace and the distinction between mixtures and pure chemicals. The chemical resistance was determined under laboratory conditions only on the basis of samples from the palm and refers only to the chemicals tested. The situation may be different if the chemical is used in a mixture. The penetration resistance was evaluated under laboratory conditions and refers only to the tested specimen. The degradation results according to EN ISO 374-4 show the change in puncture resistance of the gloves after exposure to the tested chemical.

Before use, the gloves must be checked for holes or damage.

disposal

Used gloves must be disposed of in accordance with the disposal regulations of the local waste disposal company. Unused gloves can be disposed of with household waste.

disinfection

Disinfection is not intended for these gloves and is the responsibility of the user.

warnings/ allergy information Protective gloves are intended for single use only.

This product contains dithiocarbamates, which may cause allergic reactions

donning and doffing instructions











rev-no.:

date 05.12.2024

changes and errors excepted