

Telefon: +49 (0)4171 / 8480-0 Homepage: www.ampri.de e-mail: info@ampri.de


Technical Data Sheet

4MPri

Article-No.: 01039

Description: **BASIC PLUS**

> Latex examination glove white, non sterile, powder free





PRODUCT DESCRIP	TION						
material	☑ Latex	Nitrile	□ Vinyl	☐ Vinyl-Nitrile-	Polyethy-lene	☐ TPE	cotton
				mixture	(PE)		
colour	☑ white	☐ blue	black	☐ mint	□ purple	mix	apple-green
characteristics	□ prepowdered	powderfree	☐ sterile	non sterile	☑ ambidex-	☐ fits hand-	☐ biodgra-
					trous	specific	dable
surface	✓ full textured	finger	☐ not textured	embossed	☑ chlorinated ins	side	
		textured					
SIZES							
	XS (5-6)	S (6-7)	M (7-8)	L (8-9)	XL (9-10)	XXL (10-11)	XXXL (11-12)
width	≤ 80 mm	80 ± 10 mm	95 ± 10 mm	110 ± 10 mm	115 ± 10 mm	-	-
length	≥ 240 mm	≥ 240 mm	≥ 240 mm	≥ 240 mm	≥ 240 mm	-	-
REGULATORY AFFA	IRS						
PPE-Regulation	☐ Category I	☐ Category II	☑ Category III	☐ no PPE-article			
(EU) 2016/425	,	,	,				
MD-Regulation	✓ Class I	Class II a	Class III	sterile	☐ measuring	no medical	ϵ
(EU) 2017/745					function	device	
Food Contact	☑ acidic foods	☑ aqueous	☐ fatty foods	☑ alcoholic	☑ dry foods	☐ not approved	
(EG) 1935/2004		foods		foods		for food-	אלו
						contact	
STANDARDISATION			•		1		
EN 388 Mechanical		blade cut			blade cut	income at the at	
Risks	abrasion resistance		tear resistance	puncture	resistance	impact test	
KISKS	resistance	resistance Coupe-Test		resistance	TDM-Test		
					I DIVI-TEST		
Level	not applicable	555,65					
Level	not applicable			l local		dama dati a	
EN 374-1	chemical		code letter	level	permeation time	degradation	ISO 274 1/Tuno B
	chemical Sodium hydroxide	40%	K	6	> 480 min	-62,5 %	ISO 374-1/Type B
EN 374-1 Chemical Risks	chemical Sodium hydroxide Hydrogen Peroxide	40% e 30%	K P	6 2	> 480 min > 30 min	-62,5 % -31,9 %	ISO 374-1/Type B
EN 374-1 Chemical Risks EN 374-4	chemical Sodium hydroxide	40% e 30%	K	6	> 480 min	-62,5 %	ISO 374-1/Type B
EN 374-1 Chemical Risks EN 374-4	chemical Sodium hydroxide Hydrogen Peroxide	40% e 30%	K P	6 2	> 480 min > 30 min	-62,5 % -31,9 %	ISO 374-1/Type B
EN 374-1 Chemical Risks	chemical Sodium hydroxide Hydrogen Peroxide	40% e 30%	K P	6 2	> 480 min > 30 min	-62,5 % -31,9 %	ISO 374-1/Type B
EN 374-1 Chemical Risks EN 374-4	chemical Sodium hydroxide Hydrogen Peroxide Formaldehyde 37%	40% = 30% 6	K P T	6 2 4	> 480 min > 30 min > 120 min	-62,5 % -31,9 % -87,4 %	KPT 50 576 5-2016
EN 374-1 Chemical Risks EN 374-4 Degradation	chemical Sodium hydroxide Hydrogen Peroxide Formaldehyde 37%	40% = 30% 6	K P T	6 2 4	> 480 min > 30 min	-62,5 % -31,9 % -87,4 %	KPT 68 (50 274-5-2016
EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5	chemical Sodium hydroxide Hydrogen Peroxide Formaldehyde 37%	40% = 30% 6	K P T	6 2 4	> 480 min > 30 min > 120 min	-62,5 % -31,9 % -87,4 %	KPT 50 576 5-2016
EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5 microorganism tightness	chemical Sodium hydroxide Hydrogen Peroxide Formaldehyde 37% The glove is tight a	40% e 30% 6	K P T T sms (viral, bacteria a	6 2 4	> 480 min > 30 min > 120 min	-62,5 % -31,9 % -87,4 %	KPT 68 150 274-5-2016
EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5 microorganism tightness	chemical Sodium hydroxide Hydrogen Peroxide Formaldehyde 37% The glove is tight a	40% = 30% 6	K P T T sms (viral, bacteria a	6 2 4	> 480 min > 30 min > 120 min	-62,5 % -31,9 % -87,4 %	KPT 68 150 274-5-2016
EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5 microorganism tightness	chemical Sodium hydroxide Hydrogen Peroxide Formaldehyde 37% The glove is tight a	40% e 30% 6	K P T T sms (viral, bacteria a	6 2 4	> 480 min > 30 min > 120 min	-62,5 % -31,9 % -87,4 %	KPT 68 150 274-5-2016
EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5 microorganism tightness EN 420 protective gloves	chemical Sodium hydroxide Hydrogen Peroxide Formaldehyde 37% The glove is tight a	40% 2 30% 6 gainst microorganis	K P T sms (viral, bacteria a	6 2 4	> 480 min > 30 min > 120 min prding to ISO 16604	-62,5 % -31,9 % -87,4 %	KPT 6N 150 374-5-2016 VIRUS
EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5 microorganism tightness EN 420 protective gloves	chemical Sodium hydroxide Hydrogen Peroxide Formaldehyde 37% The glove is tight a	40% 2 30% 6 gainst microorganis	K P T sms (viral, bacteria a	6 2 4 and fungi). Test acco	> 480 min > 30 min > 120 min prding to ISO 16604	-62,5 % -31,9 % -87,4 %	KPT IN 150 374-3-2016 VIRUS
EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5 microorganism tightness EN 420 protective gloves	chemical Sodium hydroxide Hydrogen Peroxide Formaldehyde 37% The glove is tight a	40% 2 30% 6 gainst microorganis	K P T sms (viral, bacteria a	6 2 4 and fungi). Test acco	> 480 min > 30 min > 120 min prding to ISO 16604	-62,5 % -31,9 % -87,4 %	KPT 6N 150 374-5-2016 VIRUS
EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5 microorganism tightness EN 420 protective gloves EN 455 medical gloves for	chemical Sodium hydroxide Hydrogen Peroxide Formaldehyde 37% The glove is tight a The glove meets th	40% e 30% 6 gainst microorganis ne requirements accorde requirements accorder	K P T sms (viral, bacteria according to EN 420	6 2 4 and fungi). Test acco	> 480 min > 30 min > 120 min prding to ISO 16604	-62,5 % -31,9 % -87,4 %	KPT EN 150 274-5-2016 EN 455 AQL
EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5 microorganism tightness EN 420 protective gloves EN 455 medical gloves for single use	chemical Sodium hydroxide Hydrogen Peroxide Formaldehyde 37% The glove is tight a The glove meets th	40% e 30% 6 gainst microorganis ne requirements accorder requireme	K P T sms (viral, bacteria according to EN 420	6 2 4 and fungi). Test acco	> 480 min > 30 min > 120 min ording to ISO 16604	-62,5 % -31,9 % -87,4 %	KPT 6N 50 374-5-2016 VIRUS EN 455
EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5 microorganism tightness EN 420 protective gloves EN 455 medical gloves for single use EN 455-1	chemical Sodium hydroxide Hydrogen Peroxide Formaldehyde 37% The glove is tight a The glove meets th The glove meets th	40% e 30% 6 gainst microorganis ne requirements accorder requireme	K P T sms (viral, bacteria according to EN 420	6 2 4 and fungi). Test acco	> 480 min > 30 min > 120 min ording to ISO 16604	-62,5 % -31,9 % -87,4 %	KPT EN 150 274-5-2016 EN 455 AQL
EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5 microorganism tightness EN 420 protective gloves EN 455 medical gloves for single use EN 455-1	chemical Sodium hydroxide Hydrogen Peroxide Formaldehyde 37% The glove is tight a The glove meets th The glove meets th	40% e 30% 6 gainst microorganis ne requirements accorder requireme	K P T sms (viral, bacteria according to EN 420	6 2 4 and fungi). Test acco	> 480 min > 30 min > 120 min ording to ISO 16604	-62,5 % -31,9 % -87,4 %	KPT M 150 278-5-20916 EN 455 AQL
EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5 microorganism tightness EN 420 protective gloves EN 455 medical gloves for single use EN 455-1 freedom from holes	chemical Sodium hydroxide Hydrogen Peroxide Formaldehyde 37% The glove is tight a The glove meets th The glove meets th The glove has an A general Inspection	40% e 30% 6 gainst microorganis ne requirements accorder requireme	K P T sms (viral, bacteria according to EN 420	6 2 4 and fungi). Test acco	> 480 min > 30 min > 120 min ording to ISO 16604	-62,5 % -31,9 % -87,4 %	KPT M 150 278-5-20916 EN 455 AQL
EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5 microorganism tightness EN 420 protective gloves EN 455 medical gloves for single use EN 455-1 freedom from holes	chemical Sodium hydroxide Hydrogen Peroxide Formaldehyde 37% The glove is tight a The glove meets th The glove meets th The glove has an A general Inspection	40% e 30% 6 gainst microorganis ne requirements accorder requireme	K P T sms (viral, bacteria a	6 2 4 and fungi). Test acco	> 480 min > 30 min > 120 min ording to ISO 16604	-62,5 % -31,9 % -87,4 %	KPT M 150 278-5-20916 EN 455 AQL



21423 Winsen (Luhe) - Germany Telefon: +49 (0)4171 / 8480-0 Homepage: www.ampri.de

domepage: www.ampri.de e-mail: info@ampri.de


Technical Data Sheet

Article-No.: 01039

Description: BASIC PLUS

Latex examination glove

white, non sterile, powder free

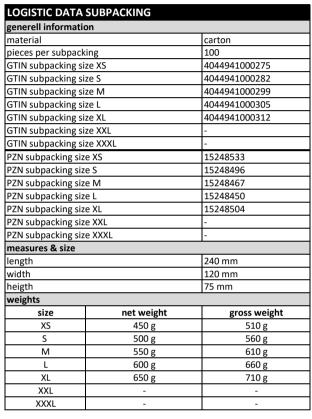

LOGISTIC DATA PALETTE						
general information	n					
kind of palett		euro-palette				
measures & size						
cartons per layer	9					
layers per palette	7					
heigth of the palett	е	187 cm				
weights						
size	net weight	gross weight				
XS	353 g	378 g				
S	384 g	409 g				
M	416 g	441 g				
L	447 g	472 g				
XL	479 g	504 g				
XXL	-	-				
XXXL	-	-				



generell information	n	
material	carton	
subpackings per out	10	
GTIN outer packing	4044941001074	
GTIN outer packing	4044941001081	
GTIN outer packing	4044941001098	
GTIN outer packing	4044941001104	
GTIN outer packing	4044941001111	
GTIN outer packing	-	
GTIN outer packing	size XXXL	-
PZN outer packing s	ize XS	-
PZN outer packing s	ize S	-
PZN outer packing s	ize M	-
PZN outer packing s	-	
PZN outer packing s	-	
PZN outer packing s	-	
PZN outer packing s	-	
measures & size		
length	383 mm	
width	243 mm	
heigth	245 mm	
weights		
size	net weight	gross weight
XS	5.100 g	5.600 g
S	5.600 g	6.100 g
М	6.100 g	6.600 g
L	6.600 g	7.100 g
XL	7.100 g	7.600 g
XXL	-	-
XXXL		





21423 Winsen (Luhe) - Germany Telefon: +49 (0)4171 / 8480-0

Homepage: www.ampri.de e-mail: info@ampri.de

Technical Data Sheet

Article-No.: 01039

Description: BASIC PLUS

Latex examination glove white, non sterile, powder free



WARNINGS AND SAFETY INFORMATION

storage /	expiry
date	

Store gloves in original packaging in a cool and dry place without additional weight, protect from direct sunlight. Do not store near ozone sources (laser printers, copiers). The actual expiry time in use cannot be specified in general terms, as it depends on the general conditions of use. An individual risk assessment must be carried out in each case. The expiry date - valid for proper storage - is stated on the packaging.

use and control

Always use protective gloves only for the intended use and in the correct size. A check/risk assessment must be carried out to ensure that the gloves are suitable for the intended use, as the conditions at the workplace may deviate from those of the type test depending on temperature, abrasion and degradation. Breakthrough times and permeation levels are based on laboratory measurements and are determined using samples taken from the palm of the hand. The actual duration of protection of a glove with a specific substance can vary significantly due to the conditions of use (temperature, abrasion, stretching). In the case of aggressive chemicals, degradation (change in mechanical properties) can be an important factor to consider when selecting chemical-resistant gloves. This information does not reflect the actual duration of protection in the workplace and the distinction between mixtures and pure chemicals. The chemical resistance was determined under laboratory conditions only on the basis of samples from the palm and refers only to the chemicals tested. The situation may be different if the chemical is used in a mixture. The penetration resistance was evaluated under laboratory conditions and refers only to the tested specimen. The degradation results according to EN ISO 374-4 show the change in puncture resistance of the gloves after exposure to the tested chemical.

Before use, the gloves must be checked for holes or damage.

disposal

Used gloves must be disposed of after contact with chemicals in accordance with the disposal regulations for the chemical and the regulations of the local waste disposal company. Unused gloves can be disposed of with household waste.

disinfection

Disinfection is not intended for these gloves and is the responsibility of the user.

warnings/ allergy information

Protective gloves are intended for single use only.

This product contains dithiocarbamates and natural latex, which can trigger allergic reactions, including anaphylactic reactions

donning and doffing instructions











rev-no.: 7

date 09.09.2024 changes and errors excepted